




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



MHC Bearing Checker

Low cost analysis of machinery condition, easily interpreted results and field-proven technology.

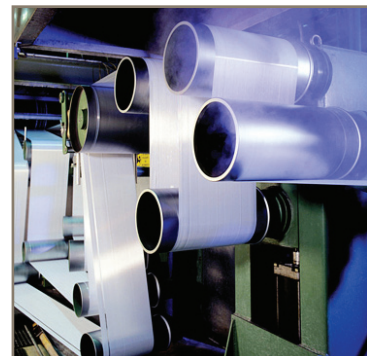

 **SIMPLEX-TURBULO**
DIRECT
www.stcdirect.com

 **Kittiwake**

ENGINEERING YOUR SUCCESS.

MHC Bearing Checker

The MHC Bearing Checker is a new, unique hand-held instrument, providing maintenance engineers with an easy to operate, simple to use and quick method of analysing bearing condition and lubrication state.

The MHC-Bearing Checker monitors high frequency Acoustic Emissions (AE) signals naturally generated by deterioration in rotating machinery. The unique way of detecting and processing these signals gives you condition-related information in the easiest possible form. It is a state-of-the-art Condition Monitoring instrument with extreme sensitivity to developing faults.

How does it work?

As the mechanical condition of machinery deteriorates, energy loss processes such as impacts, friction and crushing, generate sound wave activity that spans a broad range of frequencies. By detecting only the high frequency part of this signal with special AE sensors, it is possible to detect miniscule amounts of activity (e.g. a slight rub, a brief impact or the crushing of a single particle in the lubricant). The patented MHC sensor gives improved repeatability and is remarkably rugged. A magnetic front face allows easy attachment to multiple machines.



Easy to use and interpret parameters for quick analysis

Simply attach the unit via the magnetic sensor head and within 10 seconds, both dB Level and Distress® values will be displayed. dB Level is an indication of the overall noise of the bearing and is dependent on speed. It increases with speed of rotation, but also with degradation of the bearing or inadequate lubrication. Distress® gives an instant indication of the state of the bearing's health. A reading below 10 generally indicates normal operation, higher than 10 is usually indicative of bearing damage or the need for attention.

Distress® and dB Level are the fundamental parameters of the high-end MHC-Memo products and are trusted by thousands of maintenance engineers and technicians worldwide. These are now available in a low cost, easy to interpret pocket size instrument.

The unit is powered by an internal rechargeable battery, offering up to 1000 measurements between charges. Recharging is accomplished through a micro USB port and the unit can be connected to any standard PC USB port for ease of recharging. Can you afford not to equip all of your maintenance staff with a unit?

Specifications

| Sensor | |
|-----------------|-------------------------------------|
| Product Code | FGH11510PA |
| Sensing element | Resonant piezoelectric at ~ 100 kHz |
| Calibration | Factory set |

| Signal Measurement | Description | Range | Resolution |
|--------------------|--|-------------|------------|
| Distress® (dst) | Fault indicating parameter | 0 to 40 | 1 unit |
| dB Level (dB) | Logarithmically scaled mean signal level | 10 to 80 dB | 1 dB |


| Features | |
|-----------------------|--|
| Display | LCD, 2 lines by 8 characters |
| Distress® Display | Numeric or Text ("OK" if <10, "Suspect" if between 10 & 15, "Poor" if >15) |
| Reading in progress | Flashing LED indicator (in addition to LCD display message) |
| Non-Volatile Memory | Shows last taken readings when unit is switched on |
| Auto Shut-Off | Instrument auto switches off 30 seconds after last button press |
| Internal Batteries | NiMH rechargeable battery via micro USB port - Typically over 1000 measurements between charges |
| Operating Temperature | 0°C to 65°C |
| Overall Dimensions | 98 mm x 62 mm x 34 mm (including magnetic sensing head) |
| Weight | 225 g |

Features and Benefits:

- Last measurement recall
- Simple one-handed operation
- Rechargeable through USB port
- Ease of operation

Target Applications:

- Bearings
- Gearboxes
- Motors
- Pumps

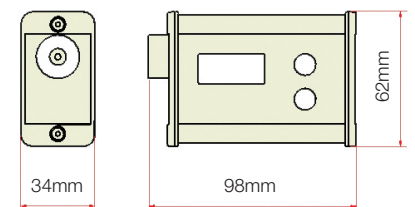

tel: +44 1264 860186
email: stcdirect@simplexturbulo.com
web: www.stcdirect.com